



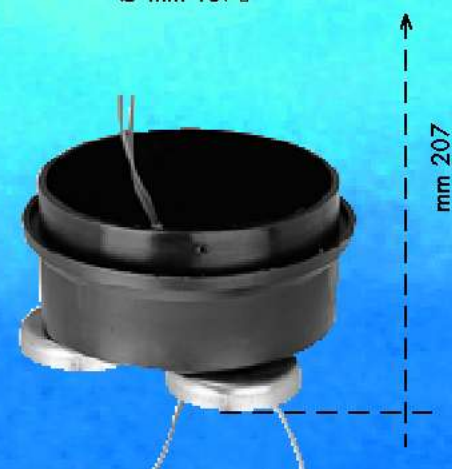

E.B.E.S.
di Spaggiari & Dondi s.n.c.
Via Bovio, 2/1 H-R zona industriale Mancasale
42010 Mancasale (Reggio Emilia) Italy
Telefono ++39 0522 92.06.75 - ++39 0522 51.22.38
Telefax ++39 0522 51.66.01
www.ebes.it - info@ebes.it

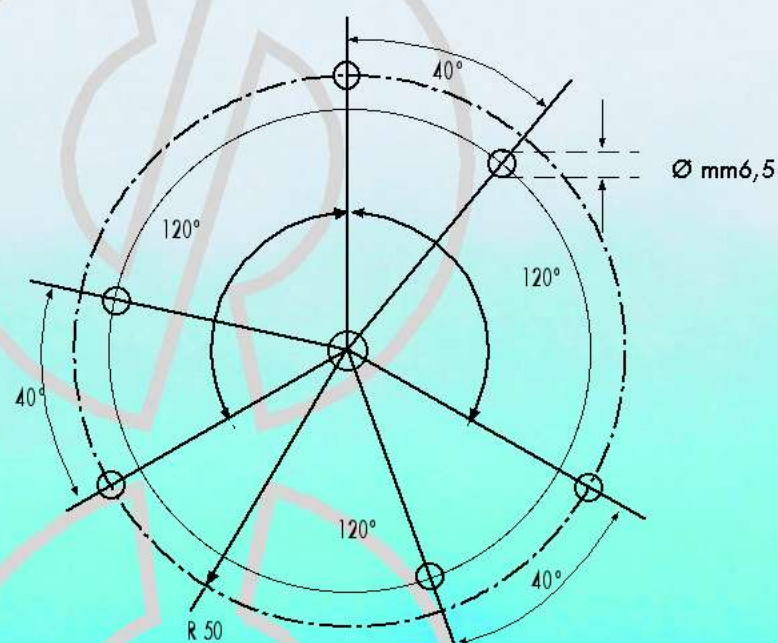

MAXILUX

Continua la generazione dei segnalatori lampeggianti tradizionali, con sostanziali differenze per questi modelli dagli attuali presenti in commercio. Tutta la gamma è caratterizzata da materiali di qualità superiore. La luminosità molto accentuata dal caratteristico riflesso doppio "BILUX", dato dalle prismaticizzazioni create dalla ricerca del produttore, tende a soddisfare le sofisticate esigenze dei clienti con i modelli di diversa potenza ad elevata resa luminosa. A richiesta sono disponibili anche le calotte lisce e le parabole per i lampeggiatori monodirezionali. Siamo inoltre disponibili anche a richieste diverse da quelle catalogate. N.B. Anche per il Maxilux è stato risolto il problema della breve durata delle lampade in presenza di vibrazioni, con il sistema anti-shock fornito a richiesta: con antivibranti in ditta foratura e trasformatore che alimenta la lampada a 24V. (nella versione a 115 e 230V.).

MAXIFLASH

Modello di forma e dimensioni come Maxilux fornito con lampada allo Xenon; unisce le caratteristiche di diffusione della cupola Bi-Lux al forte lampo della lampada Xeno; lampo di elevata intensità emessa in un tempo molto breve. La lampada allo Xenon, mantiene intatta la sua intensità luminosa per circa 1.000.000 di lampi, non brucia come la lampada ad incandescenza, scaricandosi di poco ogni ciclo fino ad esaurimento. E' l'ideale (fornito anche in versione stagna IP65) per allarme civile o industriale, anche per esterni.



MAXILUX

The generation of the traditional flashing signallers continues with substantial differences between these models and those at present on the market. The entire range is characterised by superior quality materials. The luminosity strongly marked by the characteristic double "BILUX" reflection, given by the prismaticisations created by the manufacturer's research, meets the clients' sophisticated requirements with the models of different power with high luminosity yield. Smooth caps and the parabolas for the single-direction flash lamps are available upon request. We are also available for requests for items that are different from those in the catalogue.

N.B. The problem of the short life of the lamps in the presence of vibration has been resolved also for Maxilux, with the anti-shock system supplied upon request: with vibration dampings in template drilling And transformer feeding the 24V. lamp (in the 115V. and 230V. version).

MAXIFLASH

This model with the shape and dimensions of the Maxilux supplied with Xenon lamp, unites the diffusion characteristics of the Bi-Lux cap with the strong flash of the Xenon lamp, high intensity flash emitted in a very short time. The Xenon lamp maintains its luminous intensity intact for about 1,000,000 flashes, does not burn like the incandescent lamp, wearing down little at a time at every cycle until it runs out. It is ideal (supplied also in the IP65 watertight version) for civil and industrial alarms, including outside. CAPLAMP SUPPORTBASEMAGNETIC BASEBASE WITH VIBRATION-DAMPINGMaxilux.





calotta
cap



supporto
lampada
lamp
support



circuito elettronico
lambo-flash
lambo-flash
electronic circuit



base
base



base magnetica
magnetic base



base con
antivibranti
base with adaptor
and vibration-damping

MAXILUX-F luce fissa
MAXILUX-L luce lampeggiante
MAXILUX-F/L luce fissa e/o lampeggiante
MAXIFLASH luce lampeggiante (con lampada allo xenon)

Servizio continuo
Lampada ba15S (a 12 o 24 o 48 V.) e14 (a 115 o 230 V.)
a U da 4 W/sec. nel modello maxiflash
Potenza lampada da 25 a 60 W.
Grado di protezione IP 53 a richiesta IP 55
Frequenza lampeggi regolabile da 30 a 180 al minuto
Temperatura di lavoro -20 +50° C.
Struttura nylon autoestinguente
Calotta metacrilato
peso 585g.
con base magnetica 910g.

MAXILUX-L/BIM. luce lampeggiante con intermittenza bimetallica

Servizio intermittente (30%)
Lampada ba15S 24V 25W.
Grado di protezione IP 53
Frequenza lampeggi 60-120 al minuto non regolabili
Temperatura di lavoro -20 +50° C.
Struttura nylon autoestinguente
Calotta metacrilato
peso 560g.
con base magnetica 870g.

MAXILUX-F steady light
MAXILUX-L flashing light
MAXILUX-F/L steady and/or flashing light
MAXIFLASH flashing light (by xenon lamp)
Service continuous
Lamp ba15S(12 or 24 or 48V) e14 (115 or 230V)
a U 4W/sec by maxiflash model
Lamp power from 25 to 60 W
Protection IP53 upon request IP55
Flashing frequency adjustable from 30 to 180 per minute
Operating temperature -20 +50°C
Structure Self-extinguishing nylon
Cap Metacrylate
Weight 585 g.
With magnetic base 910 g

MAXILUX L/BIM. Flashing light with bimetallic intermittence
Service Intermittent (30%)
Lamp ba15S 24V 25W
Protection IP53
Flashing frequency 60-120 per minute - not adjustable
Operating temperature -20 +50°C
Structure Self-extinguishing nylon
Cap Metacrylate
Weight 560 g.
With magnetic base 870 g.

